



室蘭工業大学

学術資源アーカイブ

Muroran Institute of Technology Academic Resources Archive



Hydrogen generation from greenhouse gas by discharge plasma

メタデータ	言語: English 出版者: 室蘭工業大学 公開日: 2010-03-31 キーワード: hydrogen production, low pressure glow discharge, greenhouse gas, CO2 removal, clean energy, 519 作成者: 佐藤, 孝紀, 伊藤, 秀範 メールアドレス: 所属:
URL	http://hdl.handle.net/10258/474

Hydrogen generation from greenhouse gas by discharge plasma

著者	SATOH Kohki, OSHITA Takamasa, ITOH Hidenori
journal or publication title	Memoirs of the Muroran Institute of Technology
volume	59
page range	185-187
year	2010-03-19
URL	http://hdl.handle.net/10258/474

Hydrogen generation from greenhouse gas by discharge plasma

Kohki SATOH^{*1,*2}, Takamasa OSHITA^{*1} and Hidenori ITOH^{*1}

(Received 27 May 2009, Accepted 20 November 2009)

CH₄ is decomposed by a low-pressure DC glow discharge, and partial pressures of H₂ and other by-products are measured by the mass spectrometry. The decomposition rate of CH₄ and H₂ conversion rate are calculated from the partial pressure, and the effects of mixed gases with CH₄ on the decomposition characteristics of CH₄ and H₂ conversion rate are investigated. It is found that CH₄ is completely decomposed in the DC glow discharge, and that 80%, 75% and 70% of hydrogen atoms contained in CH₄ are converted into H₂ in CH₄-Ar mixture, pure CH₄ and CH₄-CO₂ mixture, respectively. It is also found that CO, which can be used as fuel, is produced in the DC glow discharge by the decomposition of CO₂ in CH₄-CO₂ mixture.

Keyword : hydrogen production, low pressure glow discharge, greenhouse gas, CO₂ removal, clean energy

1 INTRODUCTION

Global warming due to greenhouse gases is one of the most serious environmental issues in the world. CO₂ and CH₄ are considered to be major cause of the global warming, and it is urgent to reduce the release of those gases in the air and to shift from the consumption of fossil fuel to the utilisation of clean energy like hydrogen.

Since discharge plasma generated by a high voltage application between electrodes contains energetic and highly reactive species, such as electrons, ions, excited molecules, etc., the discharge plasma has been used for material synthesis, decomposition of contaminants, surface modification, etc. using the species. In this

work, we develop a method using the energetic and highly reactive species in the discharge plasma for generating hydrogen from a greenhouse gas, CH₄. A low pressure DC glow discharge is generated in CH₄, and products in the glow discharge are investigated by mass spectrometry, and then hydrogen conversion rate from CH₄ is deduced. Further, the influence of CO₂ or Ar additive on hydrogen generation in the glow discharge is investigated. Okazaki et al.^[1] reported that about 40% of hydrogen atoms in CH₄ are converted into hydrogen molecules by a barrier discharge with Ni/Al₂O₃ catalysis. In this work, hydrogen conversion efficiency only by discharge plasma is examined.

2 EXPERIMENTAL APPARATUS AND CONDITIONS

Figure 1 shows the schematic diagram of experimental apparatus. Parallel-plate electrodes of 60 mm diameter and 14 mm separation are placed in a discharge chamber of 155 mm in inner diameter and

*1 Division of Information & Electronic Engineering, Graduate School of Engineering, Muroran Institute of Technology, 27-1 Mizumoto, Muroran 050-8585, Japan

*2 Center of Environmental Science and Disaster Mitigation for Advanced Research, Muroran Institute of Technology, 27-1 Mizumoto, Muroran 050-8585, Japan

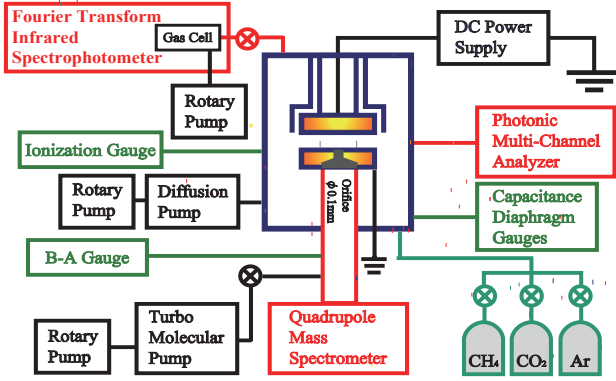


Fig.1 Schematic diagram of experimental apparatus.

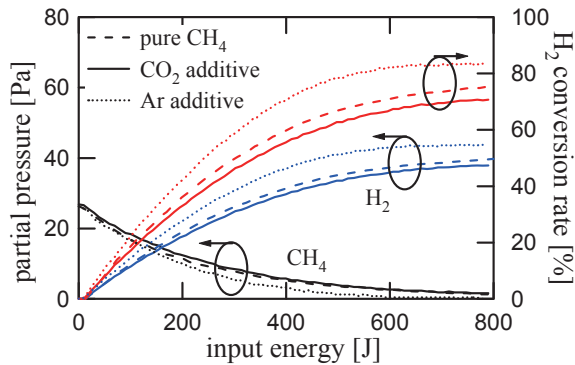


Fig.2 The variations in partial pressures of CH_4 and H_2 , and in H_2 conversion rates as a function of input energy.

300 mm in height. The lower electrode and the discharge chamber are earthed, and a negative DC voltage is applied to the upper electrode to generate a glow discharge. Pure CH_4 , and CH_4 mixed with CO_2 and Ar are introduced in the discharge chamber, and then a glow discharge is generated with a constant discharge current of 2.5 mA. The initial partial-pressure of CH_4 is kept at the constant value of 26.6 Pa through all experiments, and the initial partial-pressure of CO_2 and Ar, which is added to CH_4 , is 26.6 Pa. The purities of CH_4 , CO_2 and Ar used in this work are 99.0, 99.9 and 99.999%, respectively.

Gas sample is extracted from the glow discharge region through a 0.1 mm diameter orifice fitted at the centre of the lower electrode, and the mass spectra of the gas sample are measured using a Quadrupole Mass Spectrometer (QMS : Anelva M200QAM). The partial pressures of molecules in the sampled gas are deduced from the mass spectra, and then H_2 conversion rate is calculated by the following equation.

$$\begin{aligned} \text{H}_2 \text{ conversion rate} &= \frac{[\text{H}_2] \times 2}{[\text{CH}_4]_0 \times 4} \times 100\% \quad (1) \end{aligned}$$

where, $[\text{CH}_4]_0$ and $[\text{H}_2]$ represent the initial partial-pressure of CH_4 and the partial pressure of hydrogen, respectively. The electrical-energy input (discharge current \times applied voltage) to the glow discharge is measured every second.

3 RESULTS AND DISCUSSION

Figure 2 shows the variations in partial pressures of CH_4 and H_2 , and that in H_2 conversion rate, as a function of the electrical input energy. There is no significant difference in the variation in the decomposition rate of CH_4 when CO_2 and Ar are added to CH_4 . However, the partial pressure of H_2 clearly increases by Ar additive and it decreases slightly by CO_2 additive. The conversion rates deduced by eq.(1)

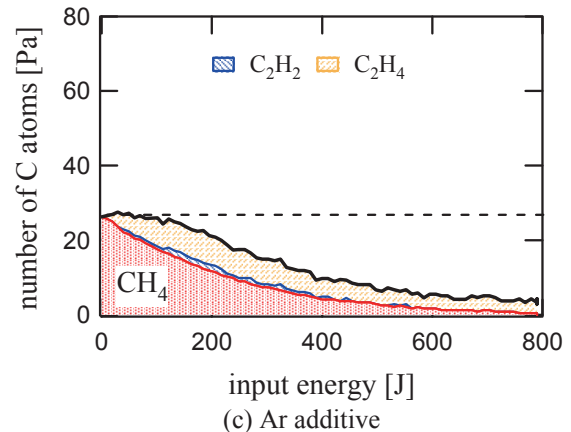
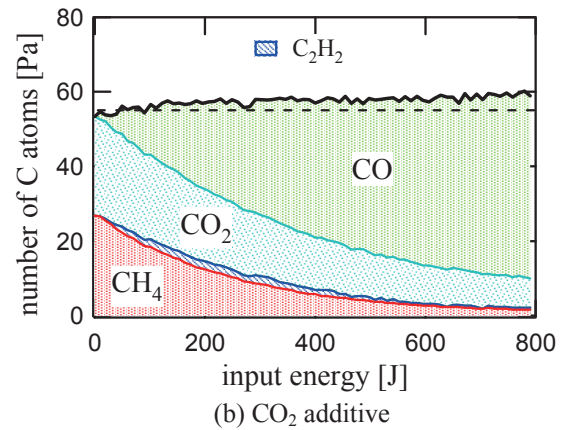
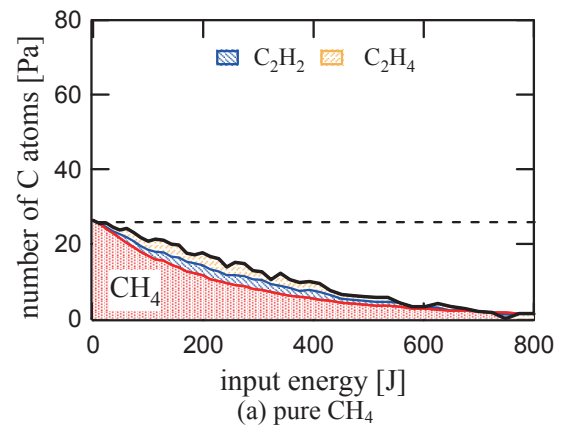


Fig.3 The variations in mass balance of carbon atoms as functions of input energies.

are 80%, 75% and 70% in CH₄-Ar mixture, pure CH₄ and CH₄-CO₂ mixture, respectively. It is, therefore, found that H₂ conversion from CH₄ is promoted by Ar additive.

The H₂ conversion rates, measured by the same experimental apparatus used here, for (CH₃)₂CO, CH₃OH, C₆H₆, C₇H₈ and C₈H₁₀ are respectively 65%, 61%, 12%, 13% and 14%; therefore, hydrogen atoms in CH₄ are found to be effectively converted into H₂ from CH₄ in the glow discharge. It is also found that hydrogen conversion rates from CH₄ in the glow discharge are higher than that obtained using the barrier discharge-Ni/Al₂O₃ catalysis reactor^[1] and by organic hydrides^[2].

Figures 3(a), (b) and (c) show the variations of mass balance for carbon atoms contained in CH₄, CO₂ and by-products (CO, C₂H₂ and C₂H₄) as functions of the input energies. The number of carbon atoms in the unit of Pa is calculated by multiplying the number of carbon atoms in each molecule of CH₄, CO₂ and the by-products by the partial pressures of those molecules. Since the total number of carbon atoms contained in gaseous molecules decreases with the partial pressure of CH₄ when the glow discharge is generated in pure CH₄, the carbon atoms are found to deposit on the electrodes and the wall of the discharge chamber. When the glow discharge is generated in pure CH₄, the discharge tends to be unstable with time.

This can be due to decreasing the secondary electrons by the change of electrode surface condition by the deposition, and increasing breakdown voltage by the reduction of gaseous molecules in the discharge region, which is typical phenomenon in the region below the

Paschen minimum.

In CH₄-CO₂ mixture, the carbon atoms in CH₄ and CO₂ are converted into CO, and the total number of carbon atoms in gas molecules does not change with the input energy. This leads that the greenhouse gases, CH₄ and CO₂ are decomposed into H₂ and CO, namely, clean energy resource and combustible material, respectively.

In CH₄-Ar mixture, some of the carbon atoms in CH₄ are converted into C₂H₄, and deposit on the electrodes and the wall of electrode. However, the glow discharge is stably sustained in the residual gas, Ar.

4 CONCLUSIONS

CH₄ is decomposed in a DC glow discharge, and the influence of CO₂ and Ar additive on H₂ generation from CH₄ is investigated in this work. It is found that the highest H₂ conversion rate (80%) is obtained in the glow discharge in CH₄-Ar mixture, and those of 75% and 70% are obtained in pure CH₄ and CH₄-CO₂ mixture, respectively. It is found that those conversion rates are higher than H₂ conversion rates from (CH₃)₂CO, CH₃OH, C₆H₆, C₇H₈ and C₈H₁₀. It is also found that CO, which can be used as combustible material, is produced in an artificial greenhouse gas, CH₄-CO₂ mixture.

REFERENCES

- (1) Okazaki et al., The proceedings of 25th symposium of processing plasma, T-01, 5 (2008)
- (2) The compilation of techniques using hydrogen, NTS, Vol.27 (2003)